



# Lift King 10/2-Post Clearfloor Symmetric & Full Asymmetric\* Service Hoists


CE Euro-Certified



Australian-Certified  
4.50T (10,000lb)  
Rated Capacity



Taller, Newer features / 30° Offset Posts  
**Fixed and Adjustable Height models**  
Colour is indicative only.  
Call for specs...

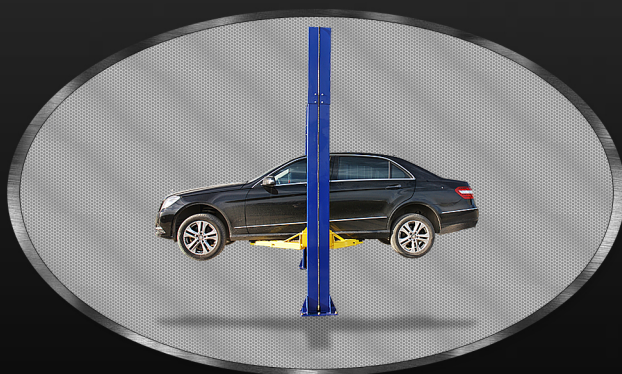

**Commercial-Grade  
2-Post Service Hoist**

**Dual Cylinder  
2021 'Double-S' Post Design**









# Lift King 10/2-Post (4500kgs value model) with 30 Degrees offset posts



Australian-Certified  
4.50T (10,000lb)  
Rated Capacity

[www.herohoists.com.au](http://www.herohoists.com.au)  
1300 79 5438

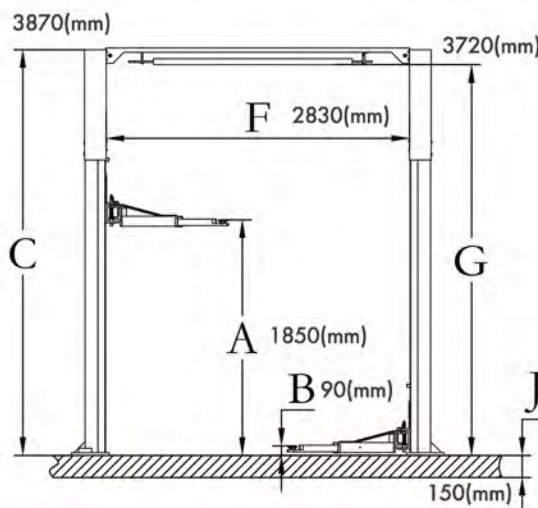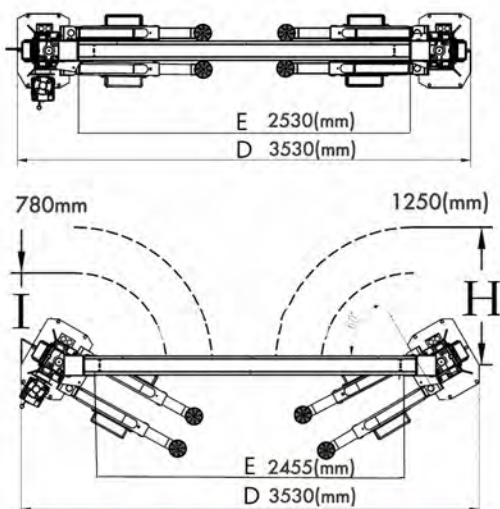

- \* Full Asymmetric Design \* Manual Lock Release
- \* 2 x Sizes of Truck Adaptors + Screw-Up Pads
- \* Double-S Post Design (lifts up to 5,500kgs)

4.5T 10000lb series lift		
Lifting Method		Direct Drive
Lock Release System		Single Point
Lifting Capacity(kg)		4500kg(10000lb)
Lifting Height drop-in pad	A	1850mm(72.8")
Pad Min.height drop-in pad	B	90mm(3.5")
Height Overall	C	3870mm(152.3")
Width Overall	D	3530mm(140")
Drive Through	E	2530mm(100")/2455mm(97")
Width Between Columns	F	2830mm(111.4")
Limit switch height	G	3720mm(146.5")
Arm Reach(Sym.) Max(mm)	H	1250mm(49.2")
Arm Reach(Sym.) Min(mm)	I	780mm(30.7")
Concrete Thickness(mm)	J	150mm(5.9")
Lifting Time		50S
Motor Power		2.2kw(3HP)




Column thickness true 5mm super strong.



One piece lock ladder looks nice and strong.



Base plate thickness 16mm stronger than other 14mm.



Double S Column



Arm Restraints



Parachute/Burst valve



Height Limit Switch



Double seal ring protection PU material